


# Volume flow measurement unit, comprises two ultrasound transducers located in front and behind measurement tube

**Patent number:** DE19921984  
**Publication date:** 2000-11-23  
**Inventor:** WAGNER GEORG F (DE)  
**Applicant:** WAGNER GEORG F (DE)  
**Classification:**  
- international: G01F1/66  
- european: G01F1/66B; G01F1/66F  
**Application number:** DE19991021984 19990512  
**Priority number(s):** DE19991021984 19990512

Report a data error here

## Abstract of DE19921984

Arrangement for measuring volume flow using ultrasound-running time principle or running time difference measurement, includes two ultrasound transducers, which send or receive ultrasound. The measurement section (1) has a measurement tube (5) and the two transducers (8, 9) are located in front of and behind the tube. An ultrasound stream is generated parallel to the tube longitudinal axis (7). The tube consists of a material whose sound damping is  $> 3$  dB/cm at an ultrasound frequency of 1 MHz.

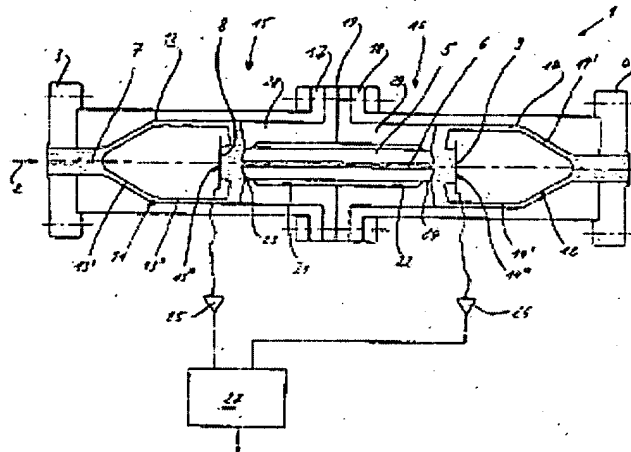

Data supplied from the [esp@cenet](mailto:esp@cenet) database - Worldwide